



15 litre Coffee Percolator/Urn Instruction manual



(NL) 15 liter koffieketel
Handleiding

(FR) Cafetière électrique 15 litres
Mode d'emploi

(DE) Kaffeemaschine 15 Liter
Bedienungsanleitung

(IT) Scaldacaffè da 15 litri
Manuale di istruzioni

(ES) Cafetera de 15 litros
Manual de instrucciones

(PT) Cafeteira de café - 15 litros
Manual de instruções

(S) 15 liters kaffekokare
Bruksanvisning

(DK) 15 liter kaffemaskine
Instruktionsvejledning

(N) 15 liters urnetrakter
Brukerhåndbok

(FIN) 15 litran kahvinkeitin
Ohjekirja

**Model • Modèle • Modell • Modello • Modelo • Malli:
F249**

Operation


1. Remove the appliance from the packaging. Make sure that all protective plastic film and plastic coatings are thoroughly removed from all surfaces.

i **Note: Before using for the first time, clean the interior of the appliance and all parts in warm soapy water, then rinse thoroughly.**

Brewing Coffee

1. Pour fresh cold water into the urn; filling it at least half way. Use the level indicator on the front of the appliance as a guide.
2. Fill the Filter basket with the desired amount of ground coffee and cover with the Basket cover.
3. Insert the Percolator tube into the urn.

i **Note: Ensure the base of the Percolator tube is securely located into the base of the percolator.**

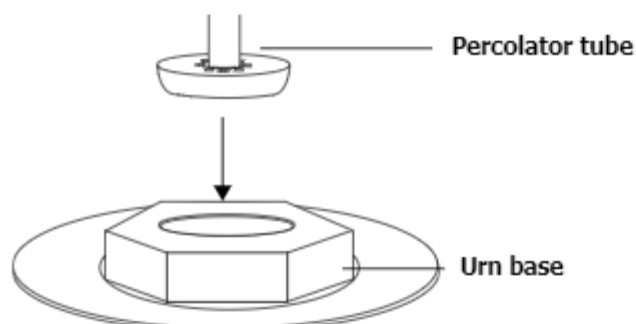


4. Slot the Basket tray over the Percolator tube. Rest the tray securely on the lugs protruding from the Percolator tube.
5. Place the Filter basket and cover over the Percolator tube and onto the Basket tray.
6. Place the lid on the Coffee Percolator.
7. Connect to the power supply and turn On to begin brewing the coffee.

⚠ WARNING: The outside of the appliance becomes very hot during use. DO NOT TOUCH!

8. The 'Ready' light is illuminated when the coffee has been brewed. The coffee is kept at serving temperature by the percolator.
9. Turn the power switch OFF when the level indicator is almost empty, or the equivalent of 3 cups of coffee is left in the urn, to prevent any damage to the heating element.

i **Note: DO NOT allow the appliance to boil dry. This invalidates the warranty.**

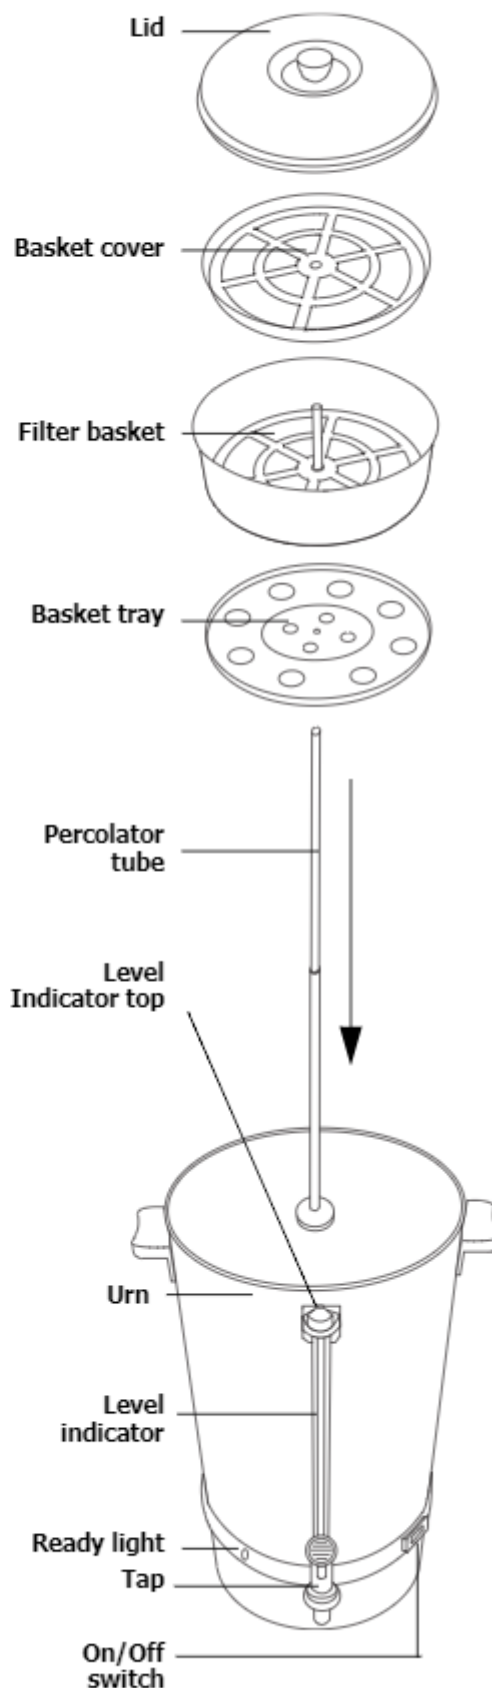

Serving

1. Place a suitable vessel beneath the tap.
2. Pull the tap towards you to begin pouring the coffee.
3. Raise the tap handle to close the tap.

Emptying the Appliance

Drain the appliance by using the tap to empty the urn.

Cleaning, Care & Maintenance

- Always turn off and disconnect the appliance from the power supply before cleaning.
- Use soapy water and a damp cloth to clean the exterior of the appliance.
- Dry thoroughly after cleaning.

Descaling

In hard water areas lime scale can build up within the appliance after prolonged use. To descale the appliance:

1. Pour a solution of descaler and water into the reservoir.
2. Brush the interior gently with a soft bristled brush.
3. Discard the solution collected in the jug.
4. Fill the reservoir with clean water and turn the appliance back On to flush out the system. Flush out the system thoroughly to remove any descaler residue.
5. The appliance is now ready for use.



Note: Use a suitable descaler and always follow the instructions on the container. BUFFALO recommend that this appliance is descaled every 3 months or more frequently in hard water areas.

Troubleshooting

Fault	Probable Cause	Action
The unit is not working	The unit is not switched on	Check the unit is plugged in correctly and switched on
	Plug and lead are damaged	Call BUFFALO agent or qualified technician
	Fuse in the plug has blown	Replace the plug fuse
	Power supply	Check power supply
	Internal wiring fault	Call BUFFALO agent or qualified technician
The appliance turns on but does not make coffee	Limescale build up in Percolator tube	Descal appliance
The tap is leaking	The tap has become loose	Tighten the tap handle
	The level indicator has become loose	Tighten the knurled top of the level indicator

Technical Specifications

Model	Voltage	Power	Current	Capacity	Weight (full)	Brewing Time (full)	Dimensions w x d x h mm
F249	230V 50Hz	1500W	6.5A	15 litres (100 cups)	20kg approx.	60 minutes approx.	530 x 360 x 280

Electrical Wiring

This appliance is supplied with a 3 pin, moulded, BS1363 plug and lead, with a 13 amp fuse as standard. The plug is to be connected to a suitable mains socket.

This appliance is wired as follows:

- Live wire (coloured brown) to terminal marked L
- Neutral wire (coloured blue) to terminal marked N
- Earth wire (coloured green/yellow) to terminal marked E

This appliance must be earthed, using a dedicated earthing circuit.

If in doubt consult a qualified electrician.

Electrical isolation points must be kept clear of any obstructions. In the event of any emergency disconnection being required they must be readily accessible.

Compliance

BUFFALO parts have undergone strict product testing in order to comply with regulatory standards and specifications set by international, independent, and federal authorities.

BUFFALO products have been approved to carry the following symbol:



All rights reserved. No part of these instructions may be produced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of **BUFFALO**.

Every effort is made to ensure all details are correct at the time of going to press, however, **BUFFALO** reserve the right to change specifications without notice.